

BExIS 2.6.0

Data Planning Manual

User Guide

Authors

Nafiseh Navabpour, Martin Hohmuth, Roman Gerlach

Contact

Website: <http://fusion.cs.uni-jena.de/bexis>
Email: bexis-support@uni-jena.de
Phone: +49-(0)3641-948968

Acknowledgement

The development of the BExIS 2 software would not be possible without the German Science Foundation (DFG) funding the BExIS++ project. BExIS++ is a collaboration of the Friedrich-Schiller-University Jena, Germany (Dept. of Computer Science, Dept. for Geography, Dept. of Ecology) and the Max-Planck-Institute for Biogeochemistry Jena, Germany.

Contents


1. Overview	3
2. Data Type Manager.....	4
3. Unit Manager	5
4. Data Attribute Manager.....	6
5. Data Structure Manager	7
5.1. Create a Data Structure	7
5.2. Add Variables	7
5.3. Create a copy data structure	8

1. Overview

In BExIS your data is stored and managed as part of a dataset. A dataset may be anything from a single record up to a collection of millions of records and multiple variables. Each dataset may have an individual structure given by the number of variables and their properties. It is up to the user or the data manager of a project to define such Data Structures. This is what the Data Planning Module is for.

The module is called “Data Planning” since it is good practice to specify the Data Structure before collecting your data in the field or the laboratory. Your data can only be uploaded to the system (using the Data Collection Module) if there is a corresponding Data Structure already existing.


A Data Structure contains one or more Data Attributes. Each Data Attribute is defined by its Data Type, a Unit, and a unique name. So defining Data Types and Units would be the first step, if they are not available yet.

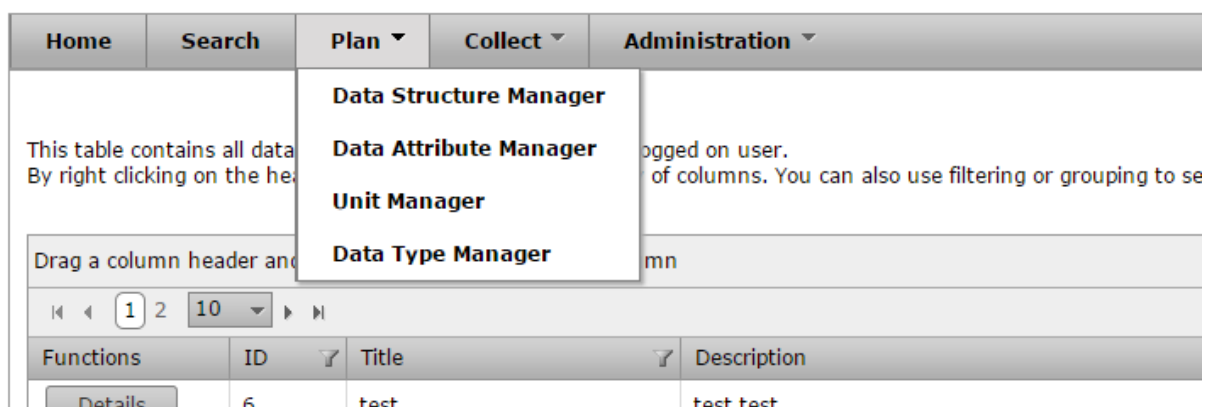



The system encourages reuse of Data Attributes, as well as Data Types and Units. For example, there should be only one Data Attribute for temperature values with a Data type of ‘float’ and measured in degree Celsius (i.e. unit). All datasets containing such temperature measurements should use this data attribute in their data structure. The advantage of such reuse is not only to avoid redundancy (e.g. different names for same thing), but is foremost to enable integration of identical variables across different datasets for large synthesis tasks later on.

2. Data Type Manager

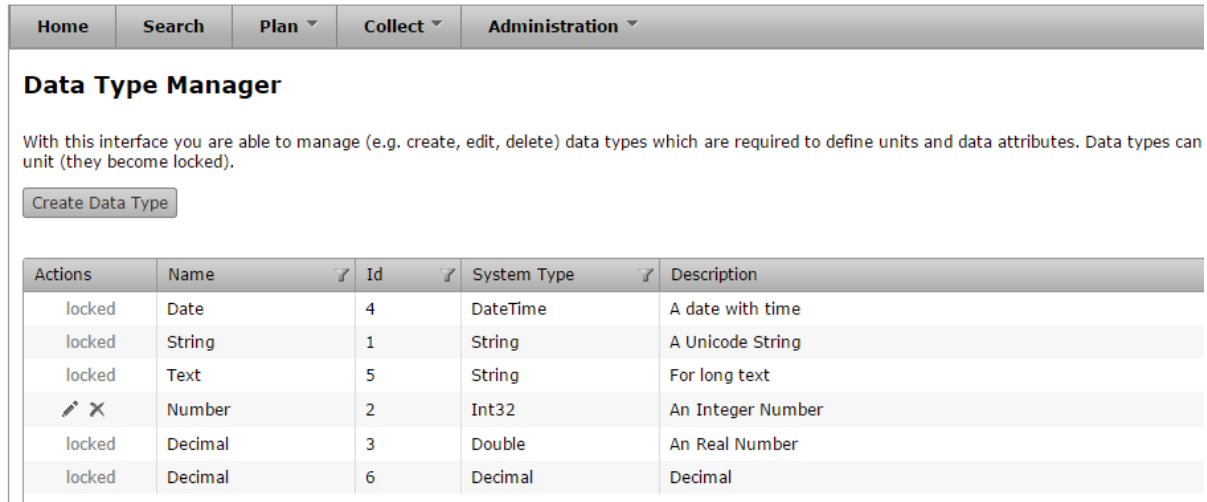With the Data Type Manager you are able to create, modify and delete Data Types. They are required to specify Data Attributes.





Actions	Name	Id	System Type	Description
locked	Date	4	DateTime	A date with time
locked	String	1	String	A Unicode String
locked	Text	5	String	For long text
 	Number	2	Int32	An Integer Number
locked	Decimal	3	Double	An Real Number
locked	Decimal	6	Decimal	Decimal

To create a Data Type, click on the Create Data Type button. Fill the fields, select a system type and click on the Save button. The Data Type is stored if all information are correct and it is not a duplicate.

Use  for edit and  for delete a data type.

In a typical project scenario, the responsible data(base) manager would have created the most common Data Types and Units.

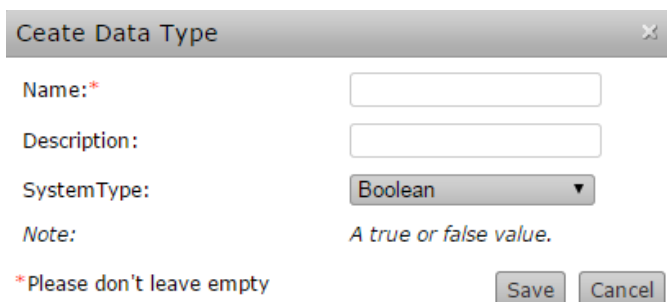

Ceate Data Type 

Name:*

Description:

SystemType:

Note: *A true or false value.*

*Please don't leave empty

3. Unit Manager

With the Unit Manager you are able to create, modify and delete Units. Units may be required to define Data Attributes.

Home	Search	Plan	Collect	Administration			
Unit Manager							
With this interface you are able to manage (e.g. create, edit, delete) units which may be needed to define data attributes. Units cannot be edited or deleted once they are associated with a data attribute (they become locked).							
Create Unit							
Actions	Name	Id	Abbreviation	Dimension	Measurement System	Associated Data Types	Description
locked	None	1	None	None	Unknown		If no unit is used.
locked	Centimeter	2	cm	Length	Metric	Decimal, Number	A length unit which is equal to one hundredth of a meter or 10^{-2} m.
	Meter	3	m	Length	Metric	Decimal, Number	A length unit which is equal to the length of the path traveled by light in vacuum during a time interval of 1/299 792 458 of a second.
	Fraction	17	fraction	Ratio	Metric	Decimal, Number	A dimensionless ratio unit which relates the part (the numerator) to the whole (the denominator).
	Millimeter	4	mm	Length	Metric	Decimal, Number	A length unit which is equal to one thousandth of a meter or 10^{-3} m.
	Events per month	25	eventPerMo...	Event Frequency	Metric	Number	Number of events occurring in 1 month.
	Gram	5	g	Mass	Metric	Decimal, Number	A mass unit which is equal to one thousandth of a kilogram or 10^{-3} kg.

To create a Unit, click on the Create Unit button. Fill the fields and select a Measurement System. For a Unit, you could define one or more data types associated by it. By clicking on the Save button, the Unit is stored if all information are correct and it is not a duplicate.

Use for edit and for delete a Unit.

✕
Create Unit

Name: *

Abbreviation: *

Description:

Dimension:

Measurement System: Unknown


	Name	Id	System Type	Description
<input type="checkbox"/>	Date	4	DateTime	A date with time
<input type="checkbox"/>	Decimal	3	Double	An Real Number
<input type="checkbox"/>	Decimal	7	Decimal	Decimal
<input type="checkbox"/>	Number	2	Int32	An Integer Number
<input type="checkbox"/>	Object	6	Object	Object
<input type="checkbox"/>	String	1	String	A Unicode String
<input type="checkbox"/>	test	8	Boolean	
<input type="checkbox"/>	Text	5	String	For long text

* Please don't leave empty

Save



4. Data Attribute Manager

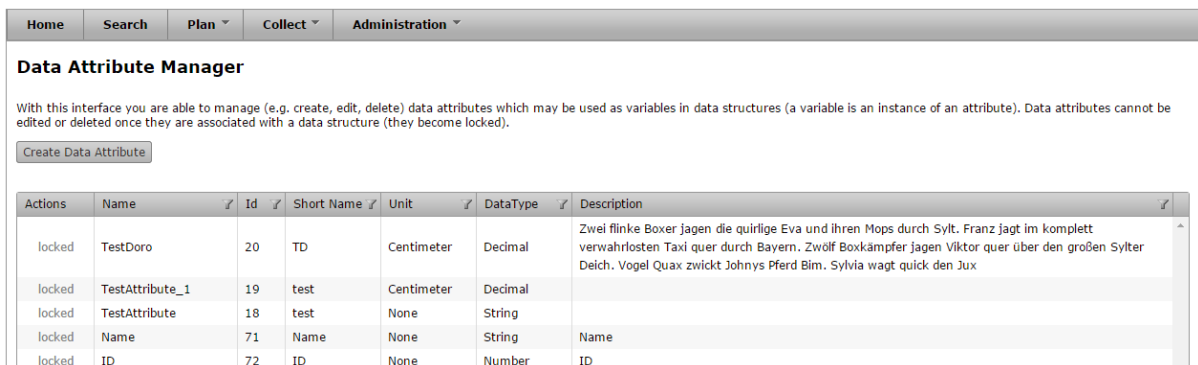
With the Data Attribute Manager you are able to create, modify and delete Data Attributes. Data Attributes as variables are required to create Data Structures.



Actions	Name	Id	Short Name	Unit	Data Type	Description
locked	TestDoro	20	TD	Centimeter	Decimal	Zwei flinke Boxer jagen die quirlige Eva und ihren Mops durch Sylt. Franz jagt im komplett verwaehrlosten Taxi quer durch Bayern. Zwölf Boxkämpfer jagen Viktor quer über den großen Sylter Deich. Vogel Quax zwickt Johnys Pferd Bim. Sylvia wagt quick den Jux
locked	TestAttribute_1	19	test	Centimeter	Decimal	
locked	TestAttribute	18	test	None	String	
locked	Name	71	Name	None	String	Name
locked	ID	72	ID	None	Number	ID

To create a Data Attribute, click on the Create Data Attribute button. Fill the fields. Select an associated Unit and Data Type and click on the Save button. The Data Attribute is stored if all information are correct and it is not a duplicate.

Use  for edit and  for delete a Data Attribute.

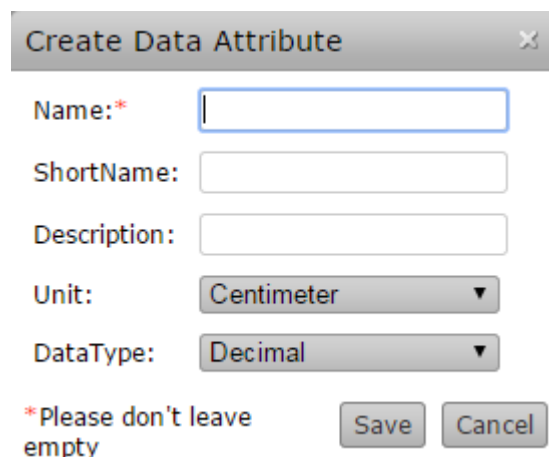

Create Data Attribute [X]

Name:*

ShortName:

Description:

Unit:

DataType:

*Please don't leave empty

Save Cancel


5. Data Structure Manager

The Data Structure Manager is a tool to create, modify and delete Data Structures. Data Structures contain Variables, which are specific instances of Data Attributes. For example, only one Data Attribute 'Count' is needed to build a Data Structure of multiple similar variables where only the name (e.g. species name) is different. Each Variable uses the same Data Attribute (e.g. instances of Count).

It is possible to create Data Structures for structured data (Excel tables, CSV-Files ...) and for unstructured data (images, videos ...).

5.1. Create a Data Structure

To create a data structure, in the plan Data Structure Manager, click on the Create Structured or Create Unstructured button. Fill fields and click on the Save button. A name for a data structure is required.

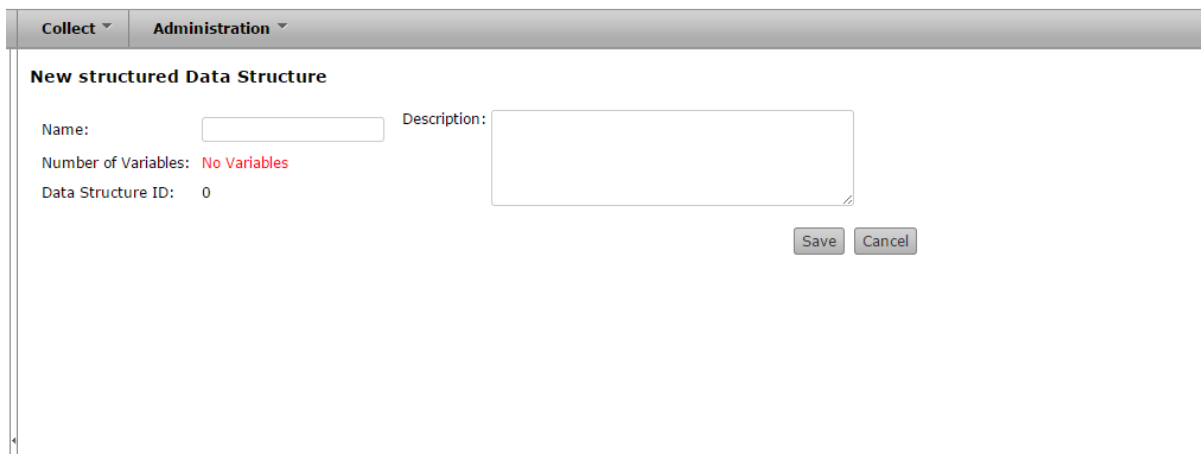

By clicking on the name of a Data Structure in the list, if it is not already in use by a dataset, you can edit it. In case of Structured, you can edit name, description or variables.

In Edit mode, you can

- see datasets that are using that data structure
- download an Excel template (in case of structured)
- delete a data structure
- create a copy by clicking on the Save as button

5.2. Add Variables

In case of structured, a data structure usually contains variables. Variables are defined before as data attributes. If a data structure is in use, you are not able to add or remove variables.



In the Add Variable window, by clicking on the up and down arrows near the variable name, you can select how many variables of that particular data attribute should be added your data structure.

⏪ ✕ ⏩ After adding variables, you can rearrange the order of the variables by using the left and right arrows. Please note, that the order cannot be changed anymore once a dataset is using this data structure. You may also delete variable from the list by using the X button.

You can define requirement for each variable. In the Optional row, if the checkbox is ticked, means that during upload data to a dataset, this variable could be empty.

Add Variable
✕

	Name		Id		Short Name		Description
0	ID	☑	22	☑	ID	☑	Identifier
1	EP PlotID	☑	30	☑	EP PlotID	☑	Name for experimental plots
0	Regime	☑	21	☑	Regime	☑	
2	Coordinate	☑	23	☑	Coordinate	☑	a coordinate system is a system which uses one or more numbers, or coordinates, to uniquely determine the position of a point or other geometric element.
1	Stratigraphic age	☑	24	☑	Stratigraphic age	☑	Reference point and criterion in the geologic record
0	Lithology	☑	25	☑	Lithology	☑	The lithology of a rock unit is a description of its physical characteristics visible at outcrop
3	Name	☑	20	☑	Name	☑	Name
0	Ecke	☑	28	☑	Ecke	☑	corner of the EP which is in center, if -1, then around original plot center

Save Cancel

5.3. Create a copy data structure

Either from a structured or unstructured data structure, you can create a copy of it by clicking on the Save as button. In that window, the Name is filled with the original one and you need to fill it with a new one.

test Save As
✕

Description: This is a test

Name:

This is a test

Save